
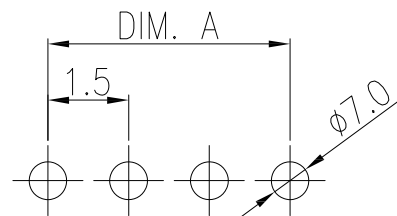
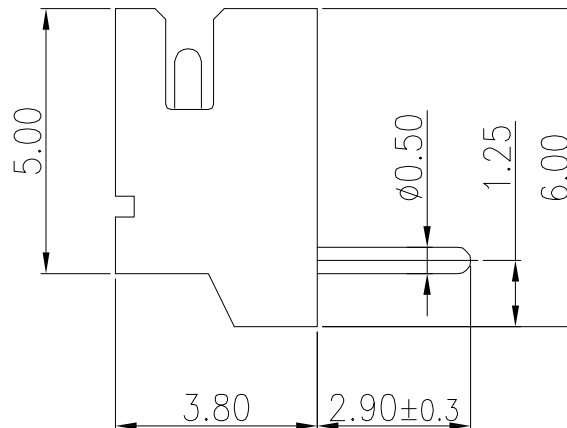



环保物料

主要技术参数 Main Specifications

线数 (Poles): 02 to 16
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 500M\Omega$
 额定电压 (Rated voltage): 125V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐电压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +120^{\circ}C$

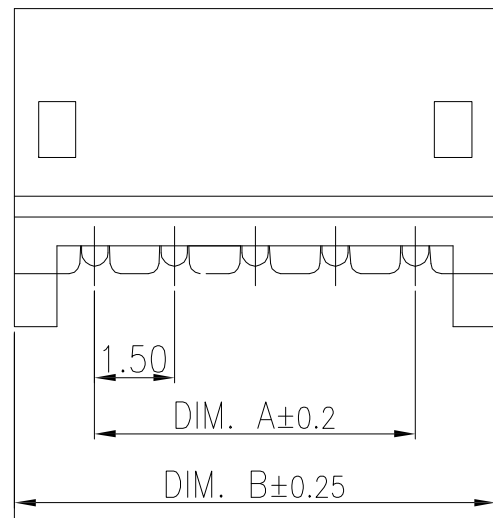

P. C. B LAYOUT

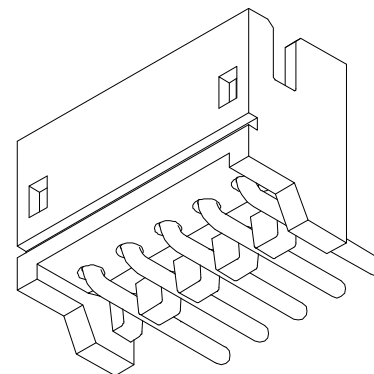

Poles	Part No.	Dimensions mm	
		A	B
2	A1501AWD-02	1.50	4.50
3	A1501AWD-03	3.00	6.00
4	A1501AWD-04	4.50	7.50
5	A1501AWD-05	6.00	9.00
6	A1501AWD-06	7.50	10.50
7	A1501AWD-07	9.00	12.00
8	A1501AWD-08	10.50	13.50
9	A1501AWD-09	12.00	15.00
10	A1501AWD-10	13.50	16.50
11	A1501AWD-11	15.00	18.00
12	A1501AWD-12	16.50	19.50
13	A1501AWD-13	18.00	21.00
14	A1501AWD-14	19.50	22.50
15	A1501AWD-15	21.00	24.00
16	A1501AWD-16	22.50	25.50

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
B	CONTACT	1~16PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	PA66	UL 94V-0(2), COLOR:WHITE

GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 网址: www.dgconne.com 电话: 0769-85337633 邮箱: 2850176986@qq.com 传真: 0769-85392827	PART. NO: 21501AWD	
LINEAR	ANGLES	1:1	黎腾	2017.06.16			
0.0 ± 0.35	X° REF ± 6°	APPROVED	肖坤权	2017.06.16	TITLE: 1.50mmPITCH 90° WAFER DIP TYPE	DWG. NO:	
0.00 ± 0.25	X° ± 3°	DESIGNER	旷淇	2017.06.16			
0.000 ± 0.15	X° X' ± 2°	DRAWN					
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	REV:	A0	SHEET: 1/1