
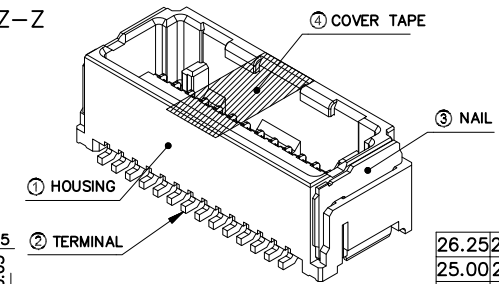
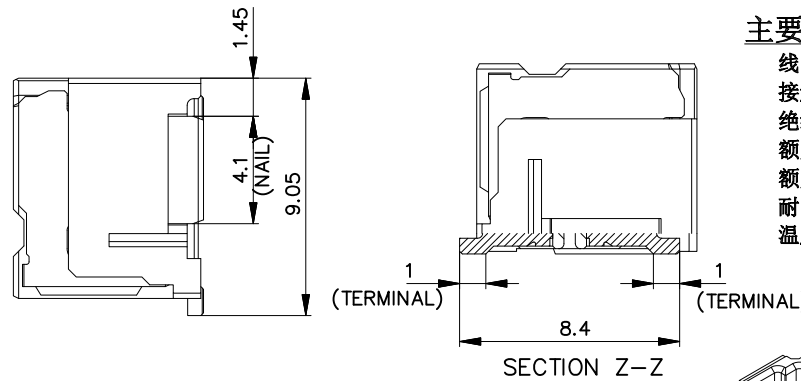


环保物料

主要技术参数 Main Specifications

线 数 (Poles): 08 to 42
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 500M\Omega$
 额定电压 (Rated voltage): 150V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐电压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +5^{\circ}C$

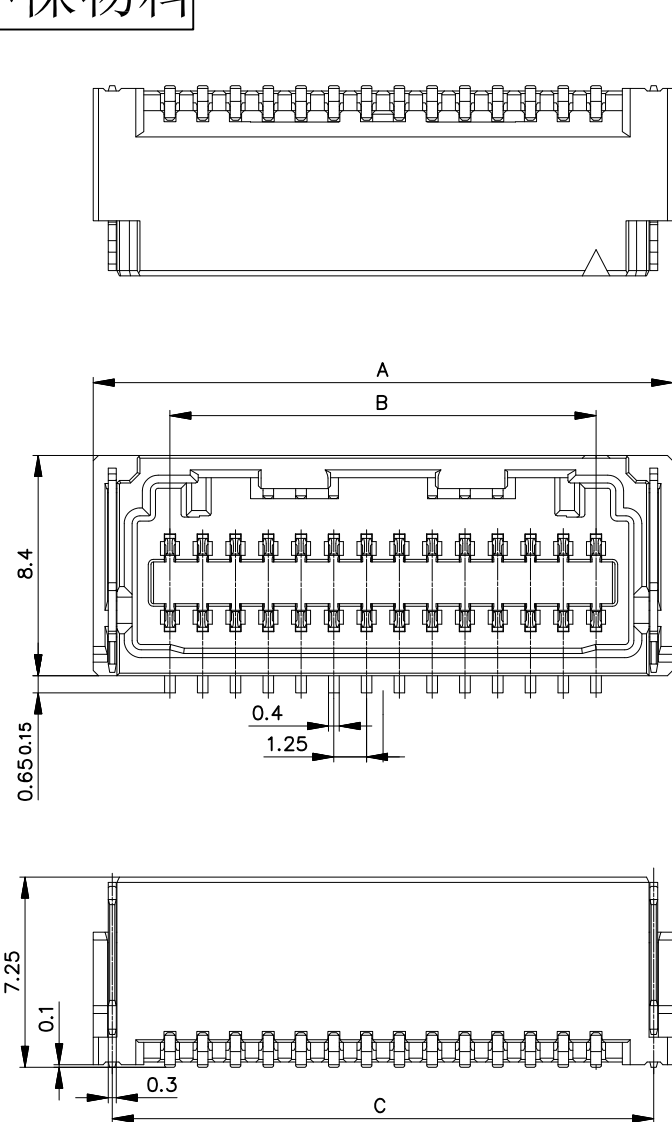

	26.25	29.40	25.00	30.85	42
	25.00	28.15	23.75	29.60	40
	23.75	26.90	22.50	28.35	38
	22.50	25.65	21.25	27.10	36
	21.25	24.40	20.00	25.85	34
	20.00	23.15	18.75	24.60	32
	18.75	21.90	17.50	23.35	30
	17.50	20.65	16.25	22.10	28
	16.25	19.40	15.00	20.85	26
	15.00	18.15	13.75	19.60	24
	13.75	16.90	12.50	18.35	22
	12.50	15.65	11.25	17.10	20
	11.25	14.40	10.00	15.85	18
	10.00	13.15	8.75	14.60	16
	8.75	11.90	7.50	13.35	14
	7.50	10.65	6.25	12.10	12
	6.25	9.40	5.00	10.85	10
	5.00	8.15	3.75	9.60	8
	D	C	B	A	CIRCUIT

PCB LAYOUT

NO.	PART	MATERIAL
①	HOUSING	PA UL94 V-0,COLOR:BEIGE
②	TERMINAL	BRASS GOLD PLATING
③	NAIL	BRASS MATTE TIN-BISMUTH PLATING
④	COVER TAPE	PA

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85392827	PART. NO: 21257AWW
				LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO:
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.25	X° ±3°	DESIGNER	肖坤权	2017.06.16	TITLE: 1.25mmPITCH 180° WAFER SMT TYPE	REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	旷淇	2017.06.16		SHEET: 1/1