
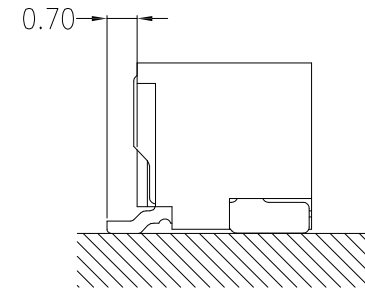
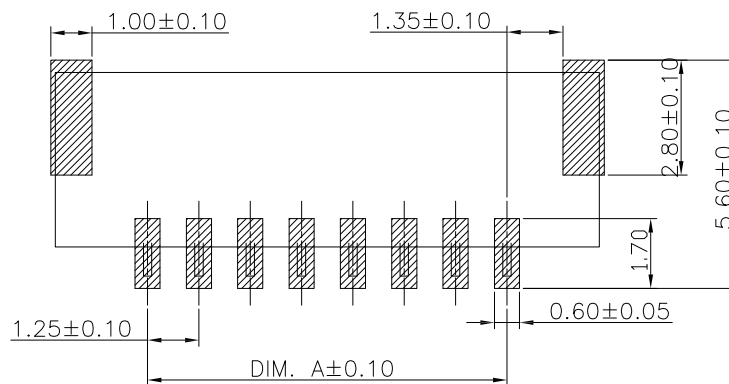
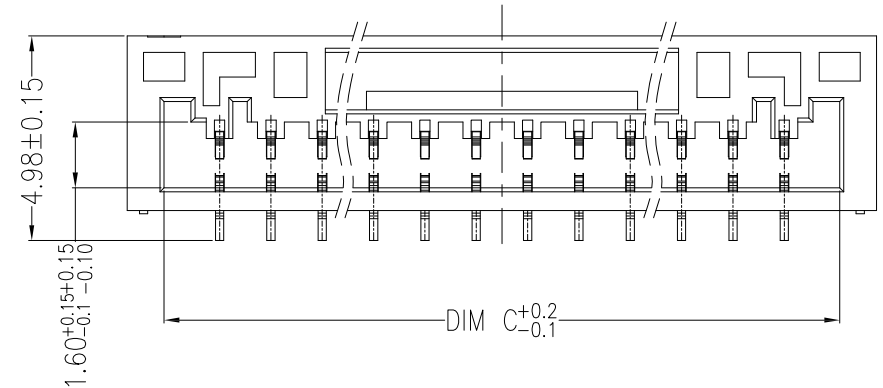
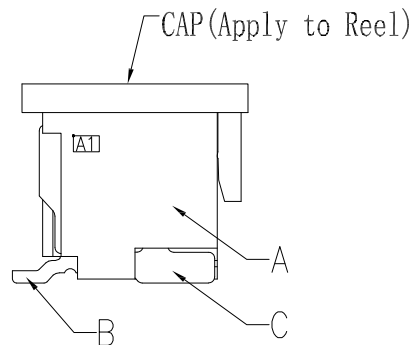


环保物料

主要技术参数 Main Specifications

线 数 (Poles): 02 to 15
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 100M\Omega$
 额定电压 (Rated voltage): 50V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐电压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range): $-40^{\circ}C \sim +110^{\circ}C$

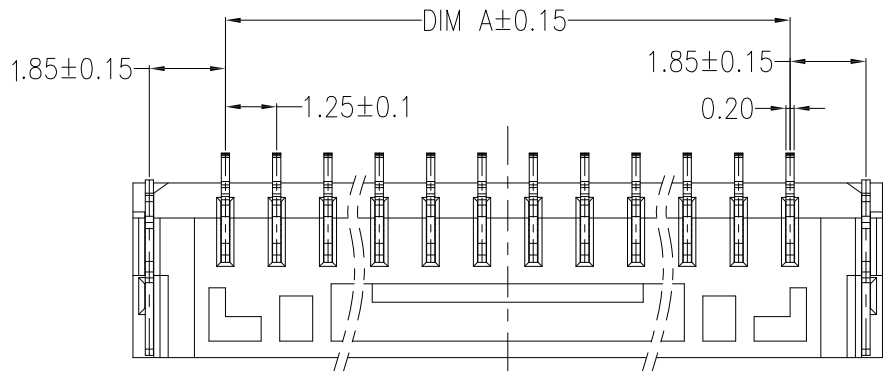

孔径 尺寸	DIM A	DIM B	DIM C	DIM E
2P	1.25	5.75	3.75	0.75
3P	2.50	7.00	5.00	1.60
4P	3.75	8.25	6.25	2.65
5P	5.00	9.50	7.50	2.50
6P	6.25	10.75	8.75	4.65
7P	7.50	12.00	10.00	4.65
8P	8.75	13.25	11.25	4.65
9P	10.00	14.50	12.50	4.65
10P	11.25	15.75	13.75	6.60
11P	12.50	17.00	15.00	6.60
12P	13.75	18.25	16.25	6.60
13P	15.00	19.50	17.50	6.60
14P	16.25	20.75	18.75	6.60
15P	17.50	22.00	20.00	6.60

D	CAP	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
C	SOLDER TAB	2 PCS	PhosphorBronze	MATTE Sn-plated
B	CONTACT	02~15PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

GENERAL TOLERANCES		SCALE:	NAME	DATE	康 导 新 能 源 网址: www.dgonns.com 电话: 0769-85337633 邮箱: 2850176988@qq.com 传真: 0769-85392827	PART. NO: 21253AWV
LINEAR	ANGLES	1:1	黎腾	2017.06.16		
0.0 ± 0.35	X° REF ± 6°	APPROVED	肖坤权	2017.06.16	TITLE: 1.25mmPITCH 180° WAFER SMT TYPE	DWG. NO:
0.00 ± 0.25	X° ± 3°	DESIGNER	尹淇	2017.06.16		
0.000 ± 0.15	X° X' ± 2°	DRAWN				
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	REV: A0	SHEET: 1/1