

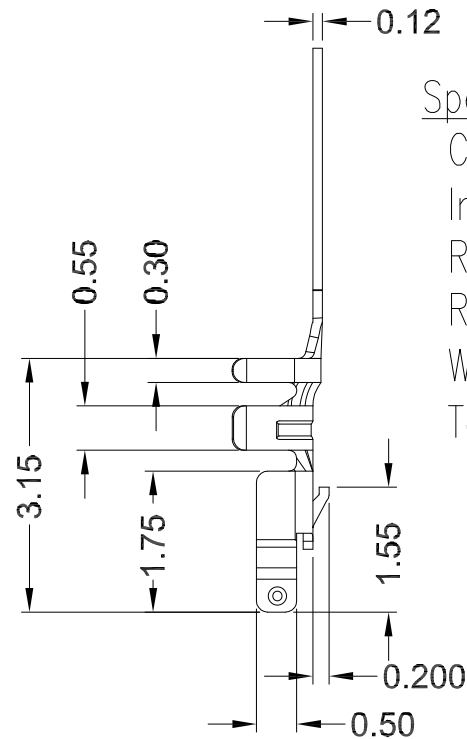


环保物料

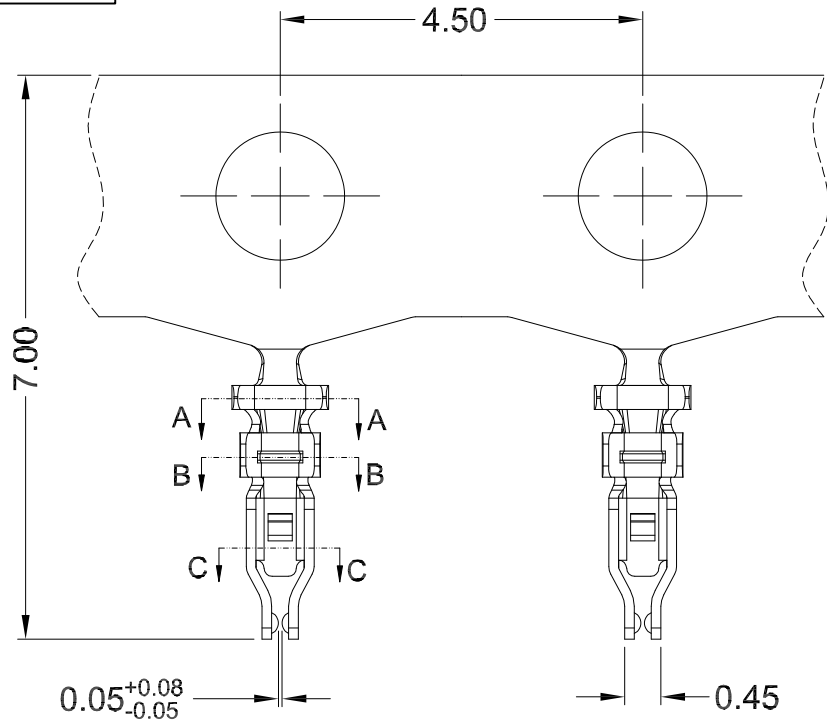


Specifications:


Contact resistance: $\leq 20\text{m}\Omega$
 Insulation resistance: $\geq 100\text{M}\Omega$
 Rated voltage: 50V AC DC
 Rated current: 2.0A AC DC
 Withstand Voltage: 500V AC/minute
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$



SECTION A-A
SCALE 1:1



SECTION B-B
SCALE 1:1



SECTION C-C
SCALE 1:1

Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
AWG #28~#30	0.70mm (MAX)	Phosphor bronze	Gold Flash	/

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850176886@qq.com 传真: 0769-85392827	PART. NO: 21201T	
				LINEAR	ANGLES					APPROVED	黎腾
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.25	X° ±3°	DESIGNER	肖坤权	2017.06.16	TITLE:	1.2mm PITCH TERMINAL	
	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X' ±2°	DRAWN	旷淇	2017.06.16	REV:	A0	SHEET: 1/1