
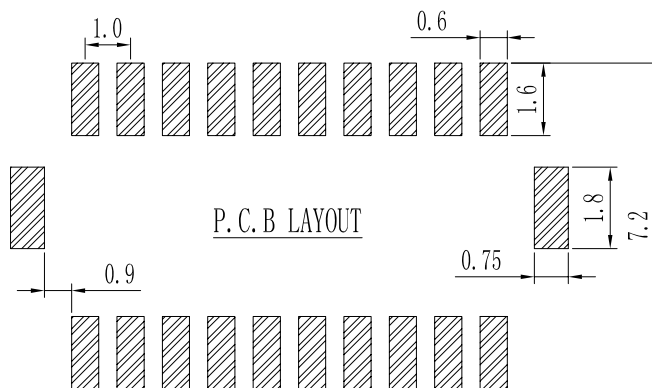
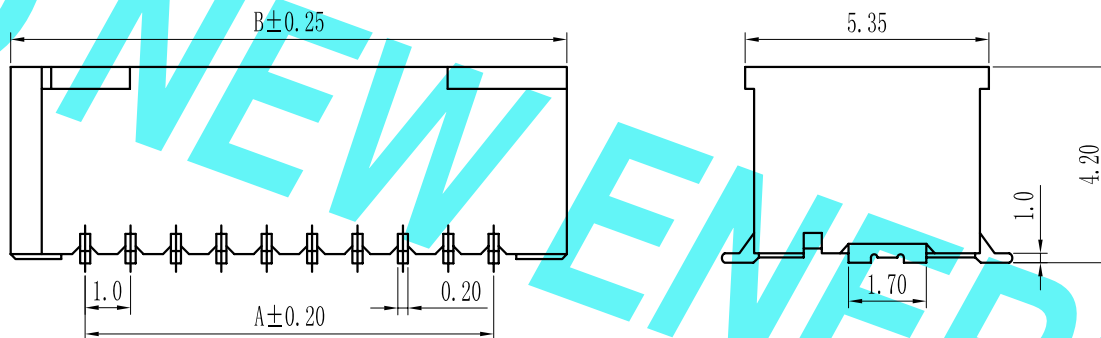


环保物料

Pin数	尺寸A	尺寸B
2	1.00	4.30
3	2.00	5.30
4	3.00	6.30
5	4.00	7.30
6	5.00	8.30
7	6.00	9.30
8	7.00	10.30
9	8.00	11.30
10	9.00	12.30
11	10.00	13.30
12	11.00	14.30
13	12.00	15.30
14	13.00	16.30
15	14.00	17.30
16	15.00	18.30
17	16.00	19.30
18	17.00	20.30
19	18.00	21.30
20	19.00	22.30
21	20.00	23.30
22	21.00	24.30
23	22.00	25.30
24	23.00	26.30
25	24.00	27.30

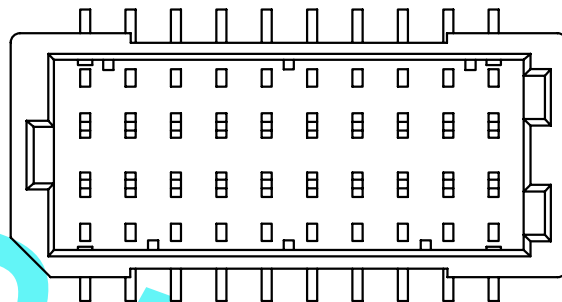

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
 - ◆额定电压: 50V DC, AC(rms)
Rated voltage: 50V DC, AC(rms)
 - ◆额定电流: 1A(AWG #28)
Rated Current: 1A(AWG #28)
 - ◆耐压值: 500V AC/minute
Withstand voltage: 500V AC/min
 - ◆工作温度: -25°C~+85°C
Working Temp:-25°C~+85°C
 - ◆绝缘电阻: 100MΩ Min
Insulation resistance: ≥100MΩ
 - ◆接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ
- 材料 MATERIAL
- ◆绝缘体: 尼龙9T, UL94-V0
Insulator: Nylon9T, UL94-V0
 - ◆接触针: 磷铜
Contact PIN: Phosphor bronze
 - ◆焊片: 磷铜
Solder tab: Phosphor bronze

GENERAL TOLERANCES		SCALE:	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO:
LINEAR	ANGLES	1:1				
0.00±0.15	X° REF±6°	APPROVED				DWG. NO:
0.00±0.08	X° X'±2°	DESIGNER				REV: A0
UNIT: MM	SIZE: A4	DRAWN	肖丽娟	2018.12.03	TITLE:	SHEET: 1/1
REV.	REVISION RECORD	DATE				