

环保物料

Specifications:

Voltage Rating : 250V AC/DC


Current Rating : 3A AC,DC

Withstand Voltage : 650V AC/minute

Contact Resistance : 30mΩ(MAX.)

Insulation Resistance : 100MΩ(MIN.)

Temperature Range : -40°C~+85°C

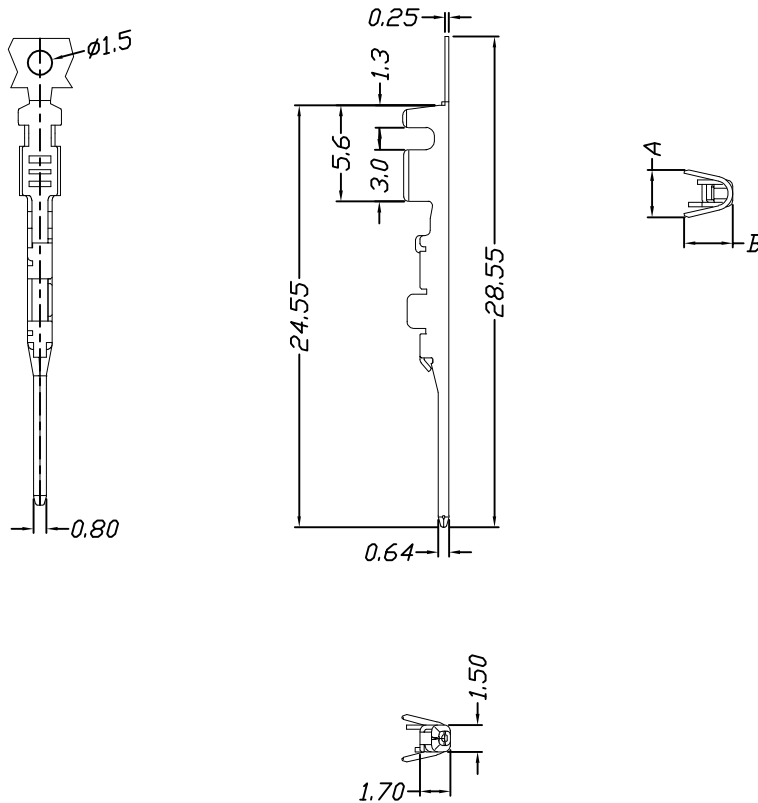

Dimensional Information:

Part No.	Dimensions	
	A	B
32202TOP-**-01	2.6	2.6
32202TOP-**-02	2.65	2.7
32202TOP-**-03	2.26	1.8

Ordering Information & Specifications

Part No	Wire Range	Insulation O. D.	Material	Finish
32202TOP-**-01	AWG#22	1.00mm	Phosphor Bronze	Au or Sn
32202TOP-**-02	-#28	(max)		

Unit: mm

GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源 网址: www.dgoonne.com 电话: 0769-853377633 邮箱: 2850175986@qq.com 传真: 0769-853922827	PART. NO: 32202TOP-**-01
LINEAR	ANGLES					
0.0±0.25	X° REF±6°	APPROVED	黎腾	2017.06.16	2. 20mm pitch Crimp Terminal	ENDE05
0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16		
0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16		
REV.	REVISION RECORD	DATE	SIZE: A4	UNIT: MM	REV: A0	SHEET: 1/1