
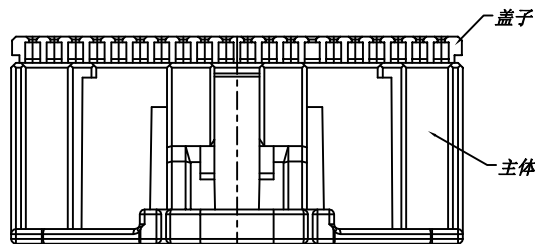



环保物料

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 3A AC,DC
Withstand Voltage : 650V AC/minute
Contact Resistance : 30mΩ(MAX.)
Insulation Resistance : 100MΩ(MIN.)
Temperature Range : -40°C~+85°C

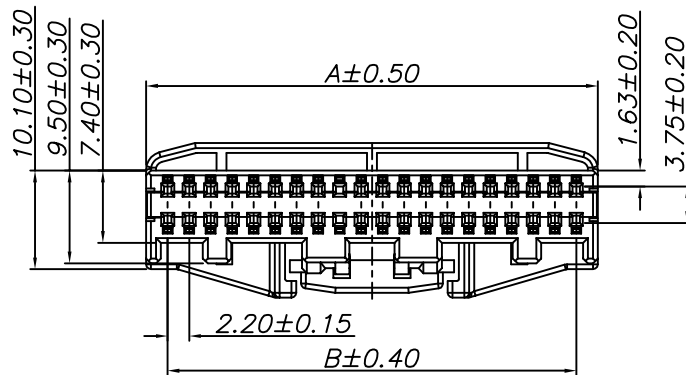

Part No	Dimensions	
	A	B
2*4P	11.00	6.60
2*6P	15.40	11.00
2*8P	19.80	15.40
2*10P	24.20	19.80
2*12P	28.60	24.20
2*14P	33.00	28.60
2*16P	37.40	33.00
2*20P	46.20	41.80

Material	Color
PBT,UL94V-0	Gray

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.25	X° REF±6°			
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16

 康导新能源 网址: www.dgonne.com 电话: 0768-853377633 邮箱: 2850175888@qq.com 传真: 0768-853022827	PART. NO: 42201H00-2*NP*-G3-66
	DWG. NO: ENDE05
	REV: A0 SHEET: 1/1

TITLE:
2.20mm pitch Dual Housing