
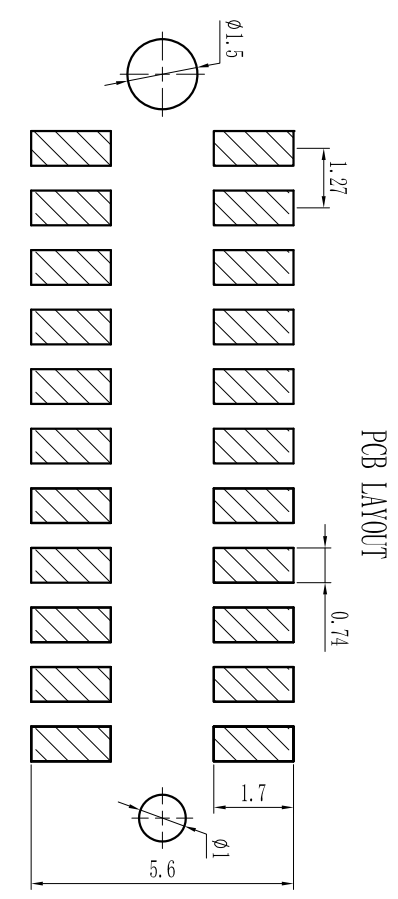
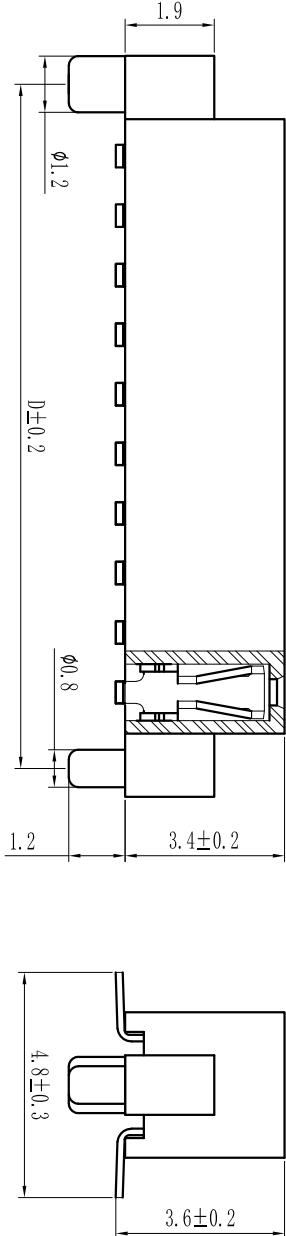


环保物料

Pin#	R-FH	R-FH	R-FH	R-FH
2x2	1.27	2.94	5.64	4.43
2x3	2.54	4.21	6.91	5.70
2x4	3.81	5.48	8.18	6.97
2x5	5.08	6.75	9.45	8.24
2x6	6.35	8.02	10.72	9.51
2x7	7.62	9.29	11.99	10.78
2x8	8.89	10.56	13.26	12.05
2x9	10.16	11.83	14.53	13.32
2x10	11.43	13.10	15.80	14.59
2x11	12.70	14.37	17.07	15.86
2x12	13.97	15.64	18.34	17.13
2x13	15.24	16.91	19.61	18.40
2x14	16.51	18.18	20.88	19.67
2x15	17.78	19.45	22.15	20.94
2x16	19.05	20.72	23.42	22.21
2x17	20.32	21.99	24.69	23.48
2x18	21.59	23.26	25.96	24.75
2x19	22.86	24.53	27.23	26.02
2x20	24.13	25.80	28.50	27.29
2x21	25.40	27.07	29.77	28.56
2x22	26.67	28.34	31.04	29.83
2x23	27.94	29.61	32.31	31.10
2x24	29.21	30.88	33.58	32.37
2x25	30.48	32.15	34.85	33.64
2x26	31.75	33.42	36.12	34.91
2x27	33.02	34.69	37.39	36.18
2x28	34.29	35.96	38.66	37.45
2x29	35.56	37.23	39.93	38.72
2x30	36.83	38.50	41.20	39.99
2x31	38.10	39.77	42.47	41.26
2x32	39.37	41.04	43.74	42.53
2x33	40.64	42.31	45.01	43.80
2x34	41.91	43.58	46.28	45.07
2x35	43.18	44.85	47.55	46.34
2x36	44.45	46.12	48.82	47.61
2x37	45.72	47.39	50.09	48.88
2x38	46.99	48.66	51.36	50.15
2x39	48.26	49.93	52.63	51.42
2x40	49.53	51.20	53.90	52.69
2x41	50.80	52.47	55.17	53.96
2x42	52.07	53.74	56.44	55.23
2x43	53.34	55.01	57.71	56.50
2x44	54.61	56.28	58.98	57.77
2x45	55.88	57.55	60.25	59.04
2x46	57.15	58.82	61.52	60.31
2x47	58.42	60.09	62.79	61.58
2x48	59.69	61.36	64.06	62.85
2x49	60.96	62.63	65.33	64.12
2x50	62.23	63.90	66.60	65.39

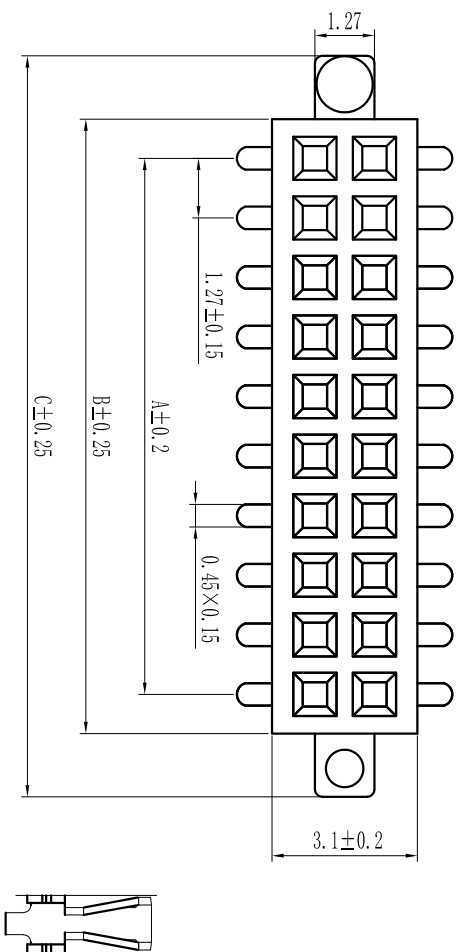

Specification:
 Current Rating : 1AMP
 Temperature Range : -40°C to +105°C
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material :
 Insulator : Polyester (UL94V-0)
 Standard: PBT/PA6T/LCP
 Contact: Bronze
 Plating : Au or Sn Over 50u" Ni

Series No.: F 12 9S-XXX X X-XX-X-XXX
 Pin Header: 08=0.80 9S=Right Angle DIP Type
 P-Form Header: 10=1.00 9S=Straight SMT Type
 P-Form Header: 12=1.27 0S=Straight DIP Type
 P-Form Header: 20=2.00 0S=Horizontal SMT Type
 P-Form Header: 25=2.54 14=14pin 20=20pin 30=30pin 50=50pin

Material Type: A-BT, B-PA6, C-PA6T, D-PIBT, E-LCP
Plating Type: 0=Sn-In 1=Sn-In 2=Sn-In 3=Sn-In 4=Sn-In 5=Sn-In 6=Sn-In 7=Sn-In 8=Sn-In 9=Sn-In 10=Sn-In 11=Sn-In 12=Sn-In 13=Sn-In 14=Sn-In 15=Sn-In 16=Sn-In 17=Sn-In 18=Sn-In 19=Sn-In 20=Sn-In 21=Sn-In 22=Sn-In 23=Sn-In 24=Sn-In 25=Sn-In 26=Sn-In 27=Sn-In 28=Sn-In 29=Sn-In 30=Sn-In 31=Sn-In 32=Sn-In 33=Sn-In 34=Sn-In 35=Sn-In 36=Sn-In 37=Sn-In 38=Sn-In 39=Sn-In 40=Sn-In 41=Sn-In 42=Sn-In 43=Sn-In 44=Sn-In 45=Sn-In 46=Sn-In 47=Sn-In 48=Sn-In 49=Sn-In 50=Sn-In

Notes Request: 0=No Request 1=30MS 2=HF (Halogen Free)
Customer Code:

GENERAL TOLERANCES		ANGLES		SCALE:		NAME		DATE	
LINER	0.0±0.25	X° REF±6°		1:1	APPROVED	黎腾	2017.06.16		
UNIT: MM	0.00±0.15	X° ±3°		DRAWN	肖坤权	肖坤权	2017.06.16		
SIZE: A4	0.000±0.08	X° X'±2°			尹琪		2017.06.16		
REV.	REVISION RECORD	DATE							
1									
2									
3									
4									
5									
6									
7									
8									

康导新能源
 网址: www.dgconne.com 电话: 0789-88337833
 地址: 2660179999@qq.com 传真: 0789-88392827

TITLE: Pitch: 2.7mm Female Header, Dual Row,
 Plastic Height 3.4mm, SMT with Local Peg Type (I)
 PART NO: KDFH-0220
 DWG. NO: ENDE1220
 REV: A0 SHEET: 1/1